







- ✓ Patented Linear Optical Technology® provides ultra wide field of view adjustable up to 120° for greater coverage with fewer cameras
- ✓ **EasyZoom**™ allows the user to optimize the field of view with minimal need for refocusing
- ✓ IR corrected for true Day/Night cameras
- ✓ Supports multi megapixel resolution cameras for demanding applications
- ✓ Compatible with 1/3", 1/2.7" HD, 1/2.5", 1/2.3" 4K* and 1/2"** sensor sizes



Typical wide angle lens

✓ With **slip ring** for ease of installation & positioning

1/2.5"

115° - 88°

99° - 71°

Lenses	SL183A	ML183A	SL183M	ML183M
	DC-autoiris	DC-autoiris	Manual iris	Manual iris
Focal length	1.8-3.0mm			
Linear Optical Technology®	Yes (Note: this technology causes the image to be flipped)			
Distortion	<1%			
Resolution	5+ megapixel			
F/#	F/1.8 to close			
IR Correction	Day/Night			
Focus range	0.5m to ∞			
EasyZoom™	Yes			
Mount	CS	С	CS	С
Iris cable length	30cm	30cm	N/A	N/A
Operating temperature	-20C to 60C (<70% humidity, non-condensing)			
Storage temperature	-20C to 70C (<90% humidity, non-condensing)			

Sensor size
Field of view (H)
Field of view (V)
Field of view (D)

<sup>117° - 90° 123° - 96° 126° - 100°

**</sup> On 1/2" sensor crop image vertically to eliminate dark corners

1/2.7" HD

116° - 89°

84° - 57°

1/3"

105° - 77°


90° - 62°


1/2.3" 4K*

120° - 92° 104° - 76°

130° - 105°

^{*4}K format = 4000 x 2000 pixels

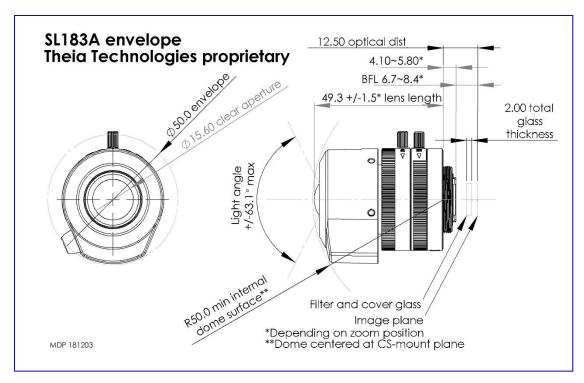

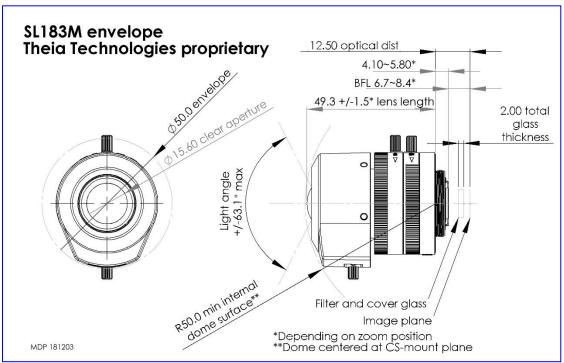

For more information, contact

Theia Technologies info@TheiaTech.com www.TheiaTech.com Phone: +1-503-570-3296



www.TheiaTech.com Rev. 20 10 29